

VIGOR

補強板快壓機



REINFORCED PLATE BOARD LAMINATING MACHINE

VFPC-05R

用途 APPLICATION

軟式印刷線路板補強板壓合。

Designed for pressing flexible printing circuit board and reinforced board.

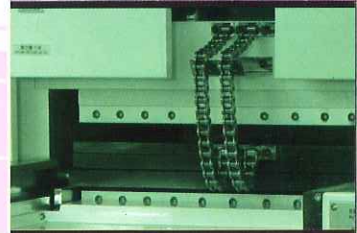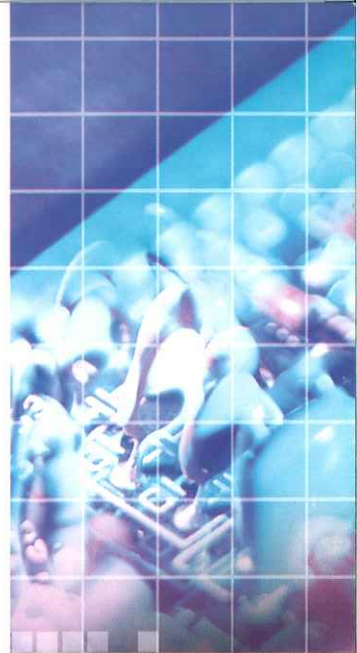

活全機器股份有限公司
VIGOR MACHINERY CO., LTD.
www.supvigor.com.tw

REINFORCED PLATE BOARD LAMINATING MACHINE

補強板快壓機

VFPC-05R
VFPC-05R

規格表 SPECIFICATIONS

項目	ITEM	單位 UNIT	VFPC-05R	VFPC-05RA(加大 Enlargement)
總出力	Tonnage	Tons	50	50
油缸直徑	Ram diameter	mm	φ 125x2	φ 125x2
床台面積	Table dimension	mm	555 x 465	630 x 480
有效壓合面積	Useful area	mm	460 x 350	560 x 390
面壓	Pressure on platen	kg/cm ²	Max. 30 (可調整adjustable)	Max. 30 (可調整adjustable)
工作壓力	Working pressure	kg/cm ²	Normal:210	Normal:210
所需電源	Electricity		3 φ 220V / 380V / 440V, 50 / 60HZ	3 φ 220V / 380V / 440V, 50 / 60HZ
所需電量	Power consumption	kw	11	12.8
真空度	Vacuum degree	torr/sec	20 torr / 2sec	20 torr / 2sec
所需空壓	Air pressure	kg/cm ²	7	7
空氣消耗量	Air consumption	L/cycle	1.2	1.5
機械尺寸(長x寬x高)	Machine dimensions (LxWxH)	mm	1180 x 875 x 1450	935 x 925 x 1300
使用溫度	Temperature	°C	Max:220	Max:220
溫度精度	Temperature accuracy	°C	180°C±3°C (以料溫線九點測量 Use temperature wire to measure at 9 points)	180°C±3°C (以料溫線九點測量 Use temperature wire to measure at 9 points)
機器重量	Machine weight	kgs	1450	1560

※規格及尺寸如有變更，恕不另行通知。

※Specifications & dimensions subject to change, without prior notice.

特性 FEATURES

- | | |
|-------------------|---|
| 1.適合覆蓋膜、純膠軟板壓合使用。 | 1.Designed for pressing covering films and pure adhesive flexible board. |
| 2.可生產單面、雙面及補強軟板。 | 2.Suitable for producing single side, double side and stiffener fpc. |
| 3.操作簡便、上線容易。 | 3.Easy to learn and to operate. |
| 4.採真空壓合、品質佳。 | 4.Vacuum pressing assures outstanding quality. |
| 5.有效延長副資材使用壽命。 | 5.Effectively extending service life of sub-material. |
| 6.有效減少轉印產生。 | 6.Effectively reducing requirement of transfer printing. |
| 7.熱盤溫度分佈均勻佳。 | 7.Heating platen features maximum uniformity of temperature distribution. |

※本資料解釋權歸活全機器股份有限公司所有。 ※Copy right by VIGOR MACHINERY CO., LTD.

活全機器股份有限公司 VIGOR MACHINERY CO., LTD.

台中縣霧峰鄉五福路798號
NO. 798, Wu-Fu Rd., Wu-Feng Hsiang, Taichung Hsien, Taiwan.
Tel:886-4-2331-3388 Fax:886-4-2331-3377 <http://www.supvigor.com.tw>
E-mail:c.s.huang@seed.net.tw E-mail:sa-2@supvigor.com.tw

大陸辦事處:
廣東省東莞市長安鎮新安社區新安二路9號城市花園B3-12D
Tel:0769-2399-4598 Fax:0769-8238-1276 服務專線:13609685297

江蘇省蘇州市吳中區碧波街遠洋花園4單元307室
Tel:0512-6267-5616 Fax:0512-6513-8125 服務專線:13776097137